


HERCULES HOISTS LIMITED



Push Pull / Geared Trolley & Beam Clamp

- ◆ Lifting
- ◆ Moving
- ◆ Storing



- ▶ Wide Range - 1T to 20 T
- ▶ Wheels fitted with sealed ball bearing
- ▶ Flange adjustability - 50 mm to 305 mm
- ▶ Anti-drop plate and anti-tilting device for protection
- ▶ Contour trolley wheel design suitable for maximum beam contact on flat or tapered beams
- ▶ Anti corrosive powder coated finish.
- ▶ Central load suspension and robust side plates with four wheels divides the load evenly



- ▶ Wide range - 1T to 10T
- ▶ Simple & safe load attachment tool
- ▶ Flange adjustability - 75 mm to 320 mm
- ▶ Ideal for erection and installation work
- ▶ Easy two step operation for urgent tasks


Material Handling. Delivered.

Redefining Material Handling. Since 1962.

www.indef.com

PULL PUSH/GEARED TROLLEY

BEAM CLAMP

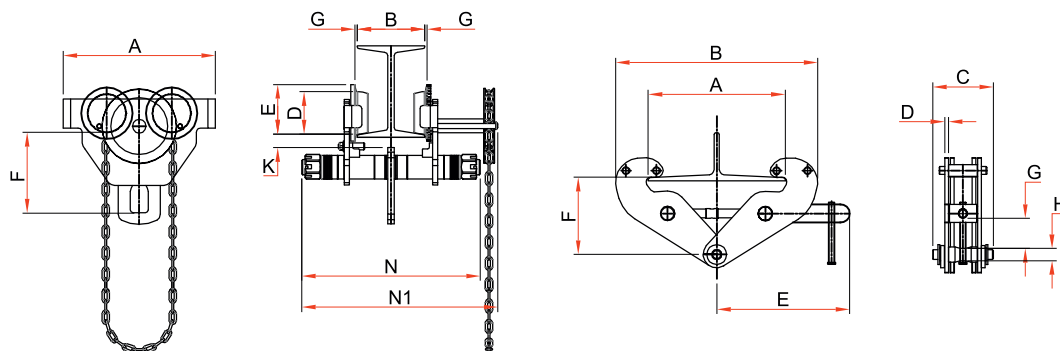

TYPE	Push trolley PTM		1	2	3	5	10	-
TYPE	Gear trolley GTM		1	2	3	5	10	20
Capacity	T		1	2	3	5	10	20
Flange width B min.-max.	R2		64-203	88-203	100-203	114-203	124-203	136-203
	R3		64-305	88-305	100-305	114-305	124-305	136-305
Min. Curve radius	m		0.9	1	1.2	1.3	1.7	2.8
A (Dimensions)	mm		246	276	332	377	389	574
D	mm		68	80	100	110	136	175
E	mm		82	94	116	127	156	200
F	mm		125	150	171	196	285	315
G	mm		2	2	3	3	3	3
K	mm		38	38	40	42	22	30
N (RANGE-R2)	mm		311	327	343	355	403	-
N1 (RANGE-R2)	mm		338	349	362	374	480	537
Weight PTM	kg		10.5	17.5	27	41	48	-
Weight GTM	kg		14.5	21.5	31	46	95	244

TYPE	BK	10	20	30	50	100
Capacity	T	1	2	3	5	10
Grip range A min.	mm	75	75	80	90	90
Grip range A max.	mm	230	230	320	320	320
B min. (Dimensions)	mm	180	180	220	220	250
B max.	mm	375	375	498	498	514
C	mm	80	90	117	127	139
D	mm	5	5	8	10	16
E	mm	220	220	271	271	280
F min.	mm	102	102	168	168	172
F max.	mm	160	160	240	240	242
G min.	mm	29	28	60	57	55
H	mm	20	22	24	30	40
Weight	kg	4	5	9	11	18

HHL/Stier Trolley - Beam Clamp /2019 18 12/V1



HERCULES HOISTS LIMITED

43/2B, Savroli-Kharpada Road, Dhamani, Khalapur - 410 202, Maharashtra, India
Regional offices: Chennai | Kolkata | New Delhi | Pune
 Tel :+91 (0)2192 662555 | Fax: +91 (0) 2192 662504
 www.indef.com | indef@indef.com

Note :- Due to continuous development and improvement specifications listed above may be changed without notice.