

HERCULES HOISTS LIMITED



Chain Pulley Block Triple Spur Gear M Series


- ◆ Lifting
- ◆ Moving
- ◆ Storing



- ▶ Capacity Range 1T to 10T
- ▶ Light weight and sturdy
Ease of handling
- ▶ Lifelong lubrication
Minimal maintenance required
- ▶ Surface hardened gears
Extended working life
- ▶ Use of needle roller bearings
High operating efficiency
- ▶ Smooth passage of load chain
Machined guide rollers
- ▶ Smooth hand chain operation
Unique cover design
- ▶ Self sustaining maintenance free friction brake.
Reduced downtime
- ▶ Grade 80 load chain for strength & wear
resistance
Longer chain life
- ▶ Anti corrosive powder coated finish
Better aesthetics

Material Handling. Delivered.

Redefining Material Handling. Since 1962.

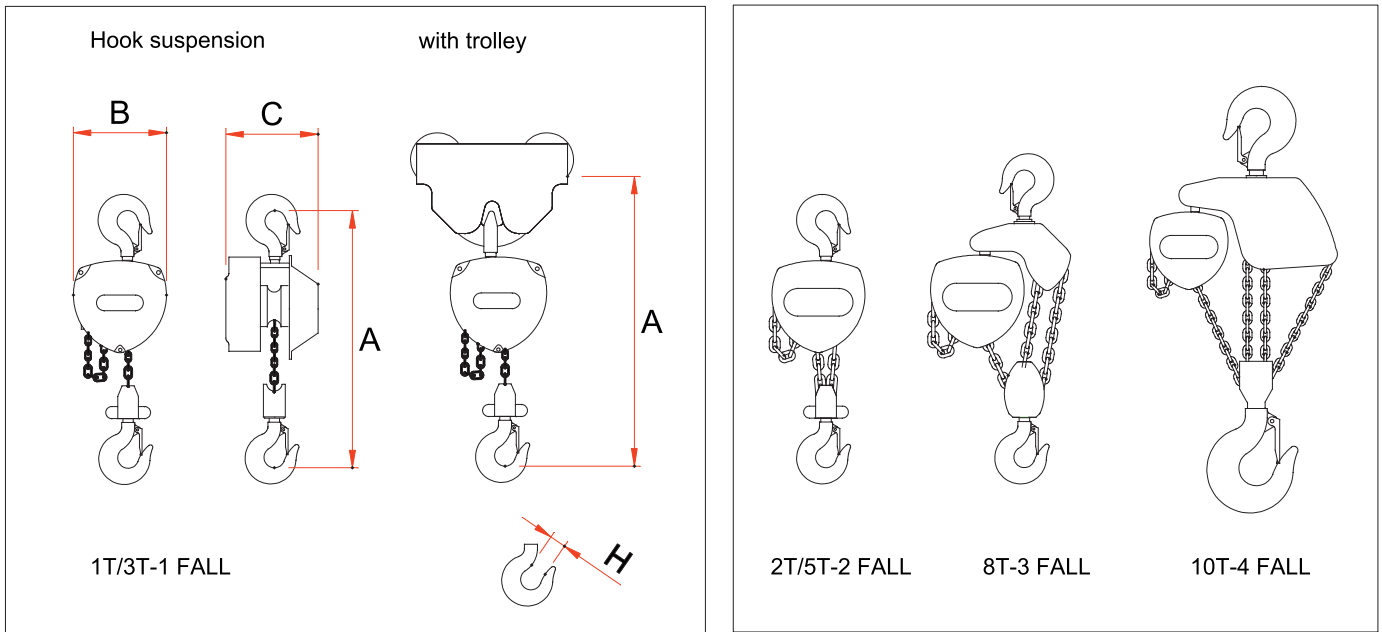

CAPACITY(T)	MT	1T	2T	3T	5T	8T	10T
Number of falls of load chain	Nos.	1	2	1	2	3	4
Load Chain size Dia.	mm	6.3	6.3	10	10	10	10
Hand Chain size Dia.	mm	5	5	5	5	5	5
A Hook suspension	mm	400	461	575	805	830	850
with trolley, range1&2	mm	430	500	705	895	980	880
with trolley, range3	mm	470	540	720	895	980	880
B	mm	180	180	238	280	430	480
C	mm	153	153	209	209	220	220
H	mm	32	32	42	51	75	75
• Weight at 3 M Lift	Kg.	13	19	29	59	94	130
• Extra weight per additional M lift	Kg.	1.8	2.6	3.0	5.7	7.9	10.1
• Running pull on hand chain	Kg.	30	33	37	41	46	43

Data tolerance $\pm 10\%$

HERCULES HOISTS LIMITED

Shelton Cubix, 501-504,
5th Floor, Plot No.87,
Sector 15, CBD Belapur
☎ : +91 2192662503
✉ : +91 2245417301
📧 : indef@indef.com

Regional Sales & Service Office:
Delhi, Kolkatta, Chennai, Pune
Works
Khalapur, Pune

bajaj group

Note:- Due To continuous development and improvement specification listed above may be changed without notice